

Hornresp - Input Parameters


File Tools Window Help

| | | | | | | | |
|-----|------------------|----|--------|-----|--------|-----|------|
| Ang | 1.0 \approx P1 | Eg | 2.83 | Rg | 0.30 | F1a | 4.55 |
| S1 | 75.00 | S2 | 87.60 | Con | 30.00 | F12 | 0.00 |
| S2 | 87.60 | S3 | 190.23 | Con | 190.20 | F23 | 0.00 |
| S3 | 190.23 | S4 | 253.00 | Con | 15.00 | F34 | 0.00 |
| S4 | 0.00 | S5 | 0.00 | L45 | 0.00 | F45 | 0.00 |


| | | | | | | | |
|-----|--------|-----|----------|-----|-------|----|------|
| Sd | 140.00 | Cms | 5.21E-04 | Mmd | 39.40 | Re | 3.60 |
| B1 | 8.48 | Rms | 3.55 | Le | 5.85 | TH | 1 |
| Vic | 0.00 | Ap | 0.00 | Vic | 0.00 | | |
| Lic | 0.00 | Lpl | 0.00 | Alc | 0.00 | | |

Comment: Tangband W6-1139G, 38Hz TH + 4.7mH (as built)

Previous New Edit Add Delete Record 75 of 100 Calculate

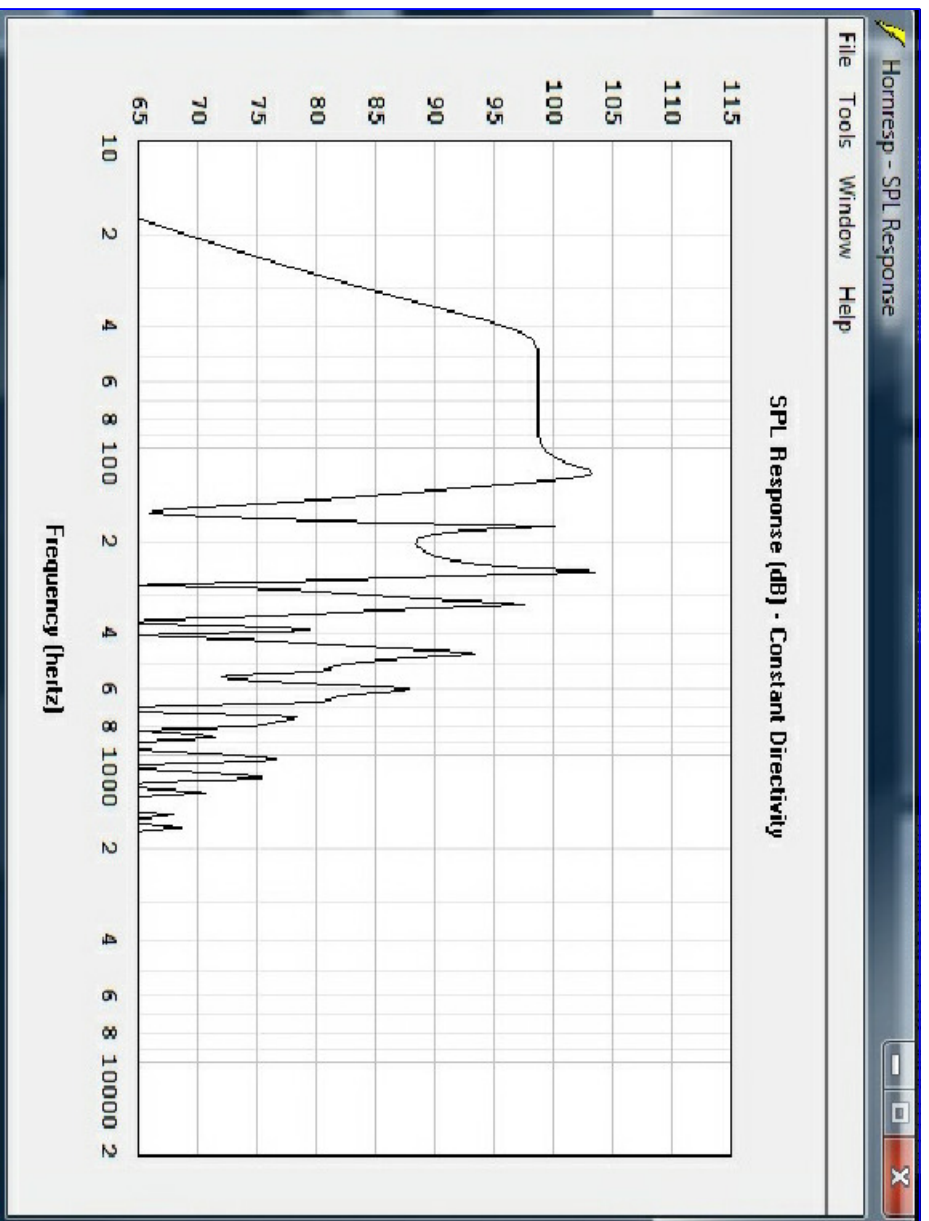

38Hz Tapped Horn for Tangband W6-1139G

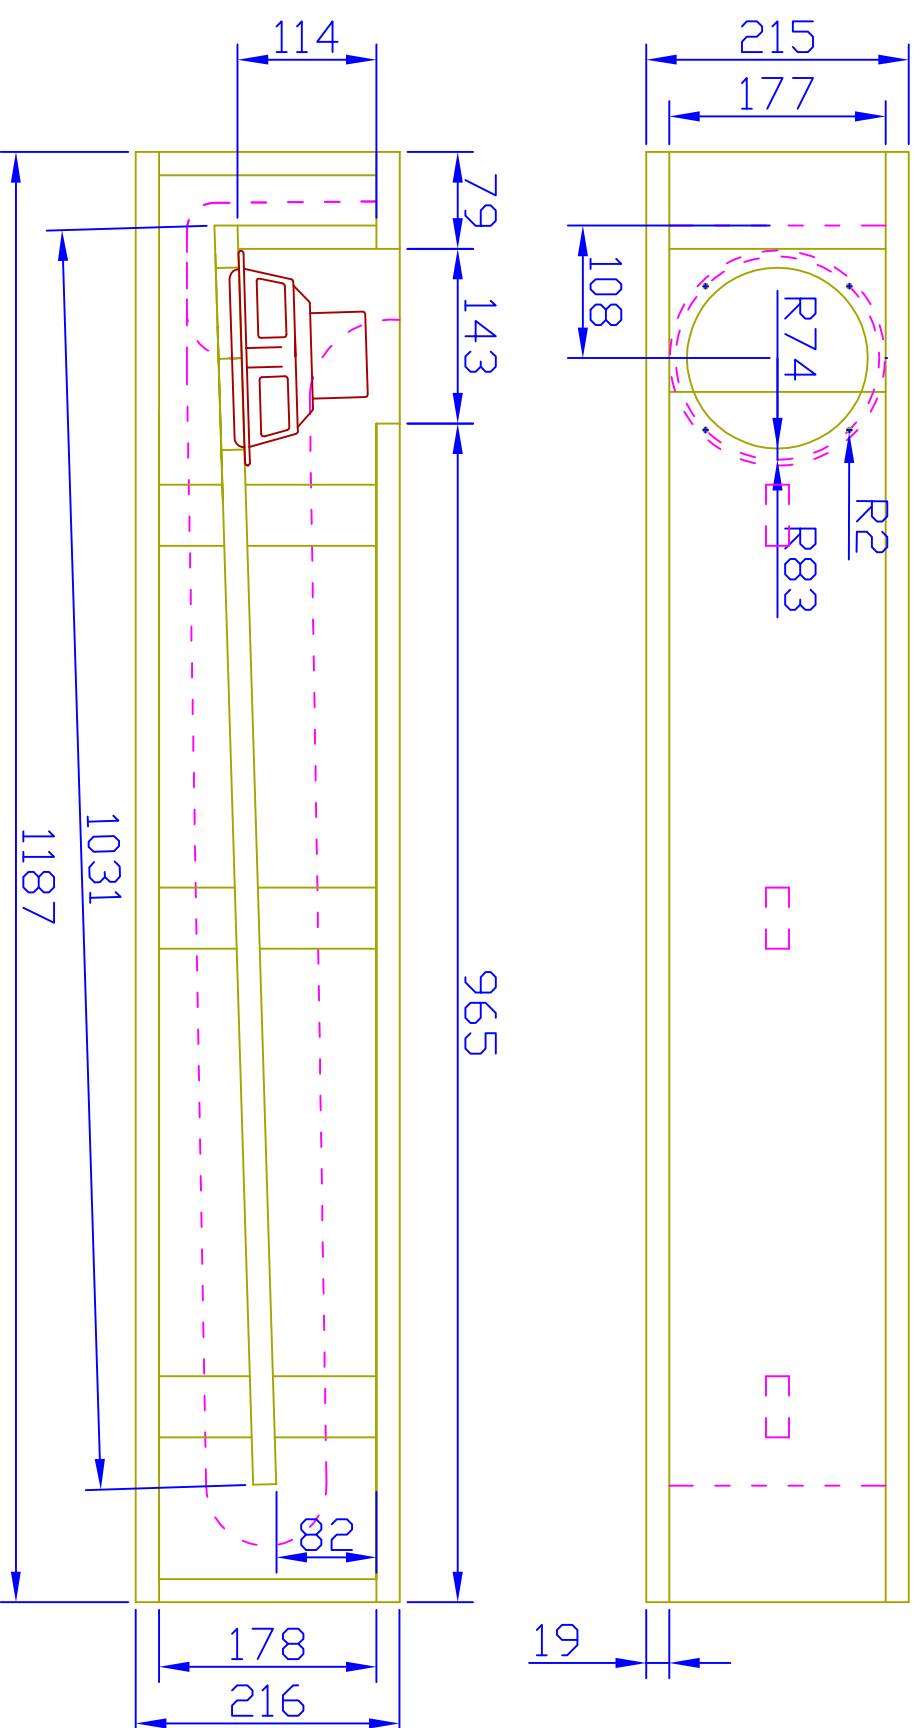

| L [mm] | X | W [mm] | Material | Count | Area |
|-------------|---|--------|----------|-------|-----------------------------|
| 79 | X | 177 | 19mm MDF | 2 | 0,0280 m ² |
| 114 | X | 177 | 19mm MDF | 2 | 0,0404 m ² |
| 1187 | X | 177 | 19mm MDF | 2 | 0,4202 m ² |
| 1031 | X | 177 | 19mm MDF | 2 | 0,3650 m ² |
| 178 | X | 177 | 19mm MDF | 4 | 0,1260 m ² |
| 965 | X | 177 | 19mm MDF | 2 | 0,3508 m ² |
| 1187 | X | 216 | 19mm MDF | 4 | 1,0256 m ² |
| Sum: | | | | | 2,3559 m² |